

3000 SERIES

NON-CLUTCHED



- Non-clutched mechanism
- 3000L (Lever)
- 3000K (Knob)
- Heavy duty lever spring return rose assembly
- Bidirectional lever operation, non-handed
- Solid brass latch bolt
- Solid brass Schlage c pin keyway cylinder
- Meets Fire Code (California State Reference Code)
- UL and CUL Listed
- Five year warranty





3000L (lever)

3000K (knob)

Grade 2 Cylindrical Locks

IDC 3000L locksets meet ADA requirments. Our 3000L and 3000K medium duty key-in locksets are designed to exceed the ANSI/BHMA A156.2 Grade 2 requirments.

SPECIFICATION				
Application	For offices, schools, hospitals, apartments, hotels, motels and other public buildings			
For Doors	1 ³ / ₈ " to 1 ³ / ₄ " (35mm to 45mm)			
Backset	2 ³ / ₈ " (60mm) or 2 ³ / ₄ " (70mm) standard			
Front	Brass, Bronze: 2 ¹ / ₄ " X 1" standard. 2 ¹ / ₄ " X 1 ¹ / ₈ " optional Adjustable for Flat or Beveled doors ¹ / ₈ " in 2"			
Strike	ST1 ANSI 1-1/4" x 4-7/8" (Standard)			
Roses	Brass or Bronze			
Hand	Universal, non-handed			
Latch bolt	Brass. 1/2 " Latch bolt standard. Stainless steel, 1/2 "Latch bolt optional			
Keys	Two Brass			
Cylinder	Brass Schlage C pin keyway standard Weiser. Arrow. Lockwood C 4. Kwikset optional			
Masterkeying	Can be masterkeyed or grand masterkeyed. Construction key system available			
Non-clutched	Non-clutched mechanism, free Wheeling not available.			
Interchangable Core	Interchangeable core will accept compatible 6 or 7 pin cores with BEST or SARGENT			
Finishes (US Code)	626 (US26D) Satin Chrome and 613 (US10B) Oil Rubbed Bronze			
Split Finishes	Outside finish specified first. Front & Strike finished to match inside trim unless otherwise specified			
UL/CUL	Listed for use on fire doors (3 Hour Rated)			

West: 800-544-4422 • East: 800-225-6737

GRADE 2 CYLINDRICAL LOCKS 3000 SERIES

NON-CLUTCHED



FUNCTION	TRIM	IDC	ANSI	DESCRIPTION
402	LEVER	10	F75	Passage or Closet Latch - Latch bolt operated by lever, from either side at all times
	LEVER	40	F76	Privacy, Bedroom or Bath Lock – Latch bolt operated by lever from either side. Outside lever is locked by push button unlocked by emergency release outside, operating inside lever or closing door.
	LEVER	53	F82	Entry Lock - Dead locking latch bolt operated by lever from either side except when outside lever is locked by push or turn button. When outside lever is locked, operating key in outside lever or operating inside lever unlocks push button and retracts latch bolt. Closing door does not release push button.
٥٠٢٩٦	LEVER	70	F84	Classroom Lock - Dead locking latch bolt operated by lever from either side except when outside lever is locked from outside by key. When outside lever is locked latch bolt is operated by inside lever.
٥٠٤١	LEVER	80	F86	Storeroom or Closet Lock – Dead locking latch bolt operated by key in outside lever, or by operating inside lever. Outside lever is always inoperable.
L	LEVER	25	F111	Exit or Communicating Passage Lock – Dead locking latch bolt operated by lever one side only at all times. Non removable blank trim or no trim outside.
4	LEVER	170		Dummy Trim 1 Side - Used as door pull or as matching inactive trim
	KNOB	53	F109	Entrance – Pushing turn-button in inside knob locks outside knob. Turning inside knob or operating key in outside knob releases button automatically. Closing door does not release button. Button is fixed in the locked position by turning to horizontal position.
	KNOB	80	F91	Double Cylinder - Deadlocking knob operated by either side. Key either locks or unlocks both sides.
	KNOB	170	F111	Exit Non-Key – Blank knob plate outside. Inside knob always unlocked.

GRADE 2 CYLINDRICAL LOCKS

3000 SERIES

NON-CLUTCHED

IDC Function

- 10 Passage
- 40 Privacy, Bedroom or Bath Lock
- 53 Entrance Lock
- 70 Classroom Lock
- 80 Storeroom

Lever Trim

R Type

R-IC Type


Finish

- 25 Communicating Passage Lock
- 170 Dummy Trim, 1 Side, Eclipse



How to Specify

Strike



ST4


L-IC Type

L Type (standard)

Mechanical Locksets

- Q 626 Dull Chrome (std) H 613 Oil Rubbed Bronze
- **ST1** ANSI 1-1/4" x 4-7/8" (Standard)
- ST2 T-Strike with dust box, ANSI 1-1/8" x 2-3/4"
- **ST3** Full lip strike, 1-5/8" x 2-1/4"
- ST4 Full lip strike with round corners, 1-5/8" x 2-1/4"

Latch bolt

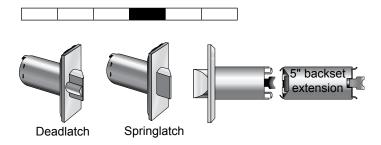

- B1 2-3/4" dead latch (standard)
- **B2** 2-3/8" dead latch
- B3 2-3/4" spring latch, passage (standard)
- **B4** 2-3/8" spring latch, passage
- **B5** 2-3/4" spring latch, privacy (standard)
- B6 2-3/8" spring latch, privacy

BE 5" backset extension, for use with 2-3/4" latch only **International Door Closers, Inc.**

COPYRIGHT 2018 INTERNATIONAL DOOR CLOSERS, INC.

Cylinder or I-Cores

IDC Conventional Cylinders (Schlage 'C' Keyway Standard) For RIC or LIC Type

6PKA 6 PIN Keyed alike

6PKD 6 PIN Keyed different (standard)



IC

IDC Interchangeable Core (Best 'A' Keyway Standard) For RIC or LIC Type

IC6P-KA 6 pin I-Core, small format, keyed alike

IC6P-KD 6 pin I-Core, small format, keyed different

IC7P-KD 7 pin I-Core, small format, keyed different

IC7P-KA 7 pin I-Core, small format, keyed alike

West: 800-544-4422 • East: 800-225-6737

www.intldoorclosers.com